


Easy Underseat Installation
 Power: 260 W (Max), 130 W (RMS)
 Amplifier Class: AB
 Low Level RCA and High-Level Inputs
 Variable Gain Control
 Low Pass Filter
 Variable Bass Boost
 Phase Control
 Auto Power-ON (with Hi-Lev Inputs)
 Remote Control

PARAMETERS

S/N Ratio: 91dB
 THD: 0.05%
 Sensitivity (1W): 92dB
 Frequency Response: 10Hz - 150Hz
 Output Impedance: 2 Ohm
 Voltage: 14.4V (10V - 16V)
 Fuse Rating: 15A
 Audio In Sensitivity: RCA Input: 150mV
 Speaker Input: 1.5V
 Input Gain: 6V - 0.15V
 Low-Pass Filter: 50Hz - 150Hz
 Bass Boost: 0 - 12dB
 Phase Switch: 0 - 180°
 Magnet Type: Ferrite
 Enclosure Housing: Aluminum
 Harness: DC Cord, Hi-Lev. and Low-Lev.
 Speaker, Input Plug
 Remote Control: Wired

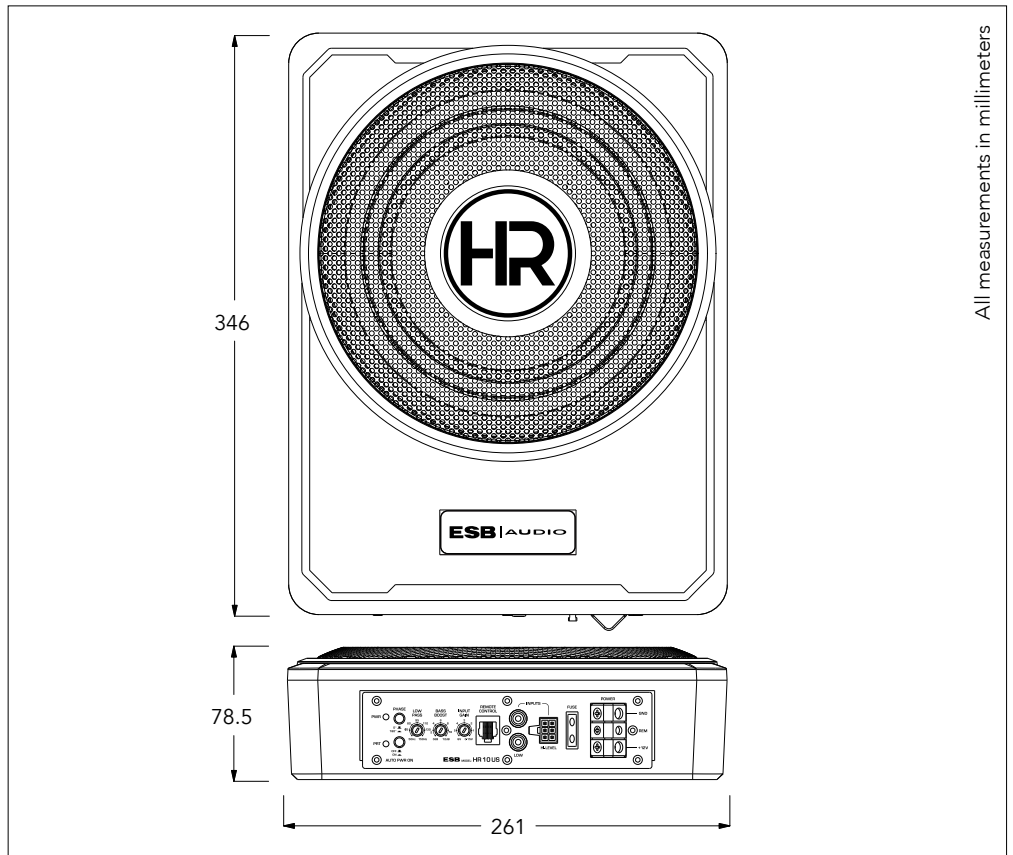

CONTROL PANEL

